



**ANELTEC**

**LUBRICANT**

## LUBRICANT ANELTEC our lubricant for rubber seals.

*To be used in order to facilitate the laying and fixing of pipes to our seals.*

To facilitate the laying of pipes and preserve the rubber seal characteristics over time, the use of a specific lubricant is crucial. To this end, we have devised and produced a non-toxic lubricant with an active ingredient made of silicon oil that can help preserving its properties and those of our seals over time.

### PRODUCT DETAILS



**Applicable manually or using a brush**  
Our ANELTEC lubricant is applicable to seals manually or by using a brush and ensures high performances.



**Resistant to high and low temperatures**  
Our ANELTEC lubricant has been devised to withstand particularly high or low temperatures.



**Available in 5 kg. packages**  
Our ANELTEC gel lubricant is available in 5 Kg buckets.



**ANELTEC srl**

Via Tagiura 10 | 20146 Milano | +39 02 42 23 343 | +39 02 48 95 24 70 (Fax)  
info@aneltec.it | www.aneltec.it

# LUBRICANT


- It can be used without problems both at very high and very low temperatures.
- It complies with the requirements of the EN 681-1 European regulations.
- It is non-toxic and with a silicon oil active ingredient.



## USE OF THE LUBRICANT

Spread the ANELTEC lubricant on the female or male part of the polished concrete surface manually (with a glove) or using a brush.

As required by the EN 681-1 European regulations, our lubricant has no negative effects on the seal durability.

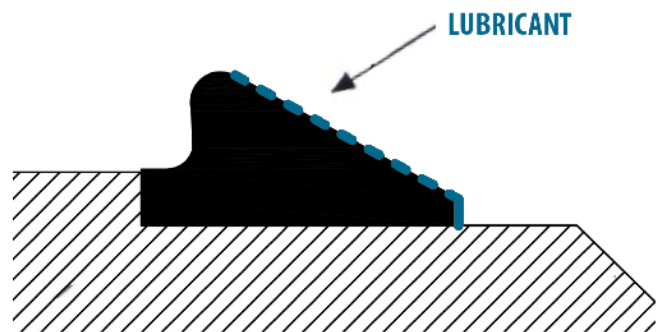

**ANELTEC** srl

Via Tagiura 10 | 20146 Milano | +39 02 42 23 343 | +39 02 48 95 24 70 (Fax)  
info@aneltec.it | www.aneltec.it