



ANELTEC

**SEALING
GASKET**

ANELTEC SEALING GASKET ANELTEC our sealing gasket.

Ideal to be used on its own or together with standard seals.


The ANELTEC sealing gasket is made of rot-proof and non-toxic expanded synthetic resin impregnated with bitumen. It is occasionally used as an alternative to the classic rubber seals even though it is typically applied in addition to them. It can be supplied with an adhesive side to be stuck to the pipe frame and is available in every shape and size. The ANELTEC sealing gasket perfectly adheres to the supports and reacts to compression stresses without coming out, filling any irregularity of the jointing.

PRODUCT DETAILS



Easy and quick laying

The product is supplied in rolls with an adhesive side provided on request for a quick and effective laying.

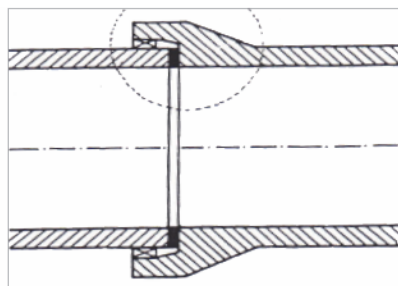

It does not come out under compression

Our ANELTEC sealing gasket has been especially studied to endure compression stresses.



It does not deteriorate while being stored

Unlike other products, our sealing gasket can be preserved for a long time without any deterioration.



ANELTEC srl

Via Tagiura 10 | 20146 Milano | +39 02 42 23 343 | +39 02 48 95 24 70 (Fax)
info@aneltec.it | www.aneltec.it


SEALING GASKET

- It can be used without problems both at very high and at very low temperatures (-20°C +100°C).
- It has an excellent chemical and mechanical adhesion to the concrete surface.
- Our sealing gasket is water-proof when 75 % compressed, sound-absorbing, vibration-damping and self-extinguishing.



GASKET LAYING

Remove the flap that protects the adhesive side and stick it to the concrete surface that has to be previously cleaned from dirt and impurities. Lay the pipes. In case the concrete is humid or cold, a solvent-based primer may enhance the sealing gasket grip.

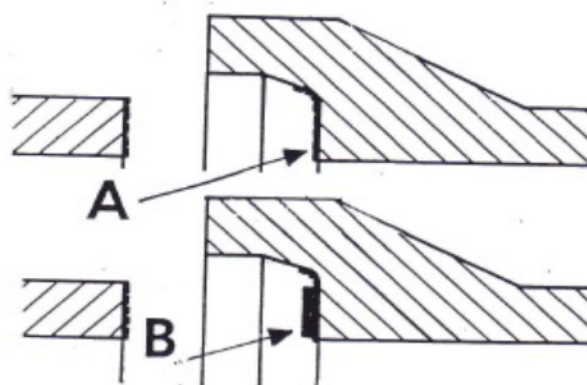

ANELTEC srl

Via Tagiura 10 | 20146 Milano | +39 02 42 23 343 | +39 02 48 95 24 70 (Fax)
info@aneltec.it | www.aneltec.it